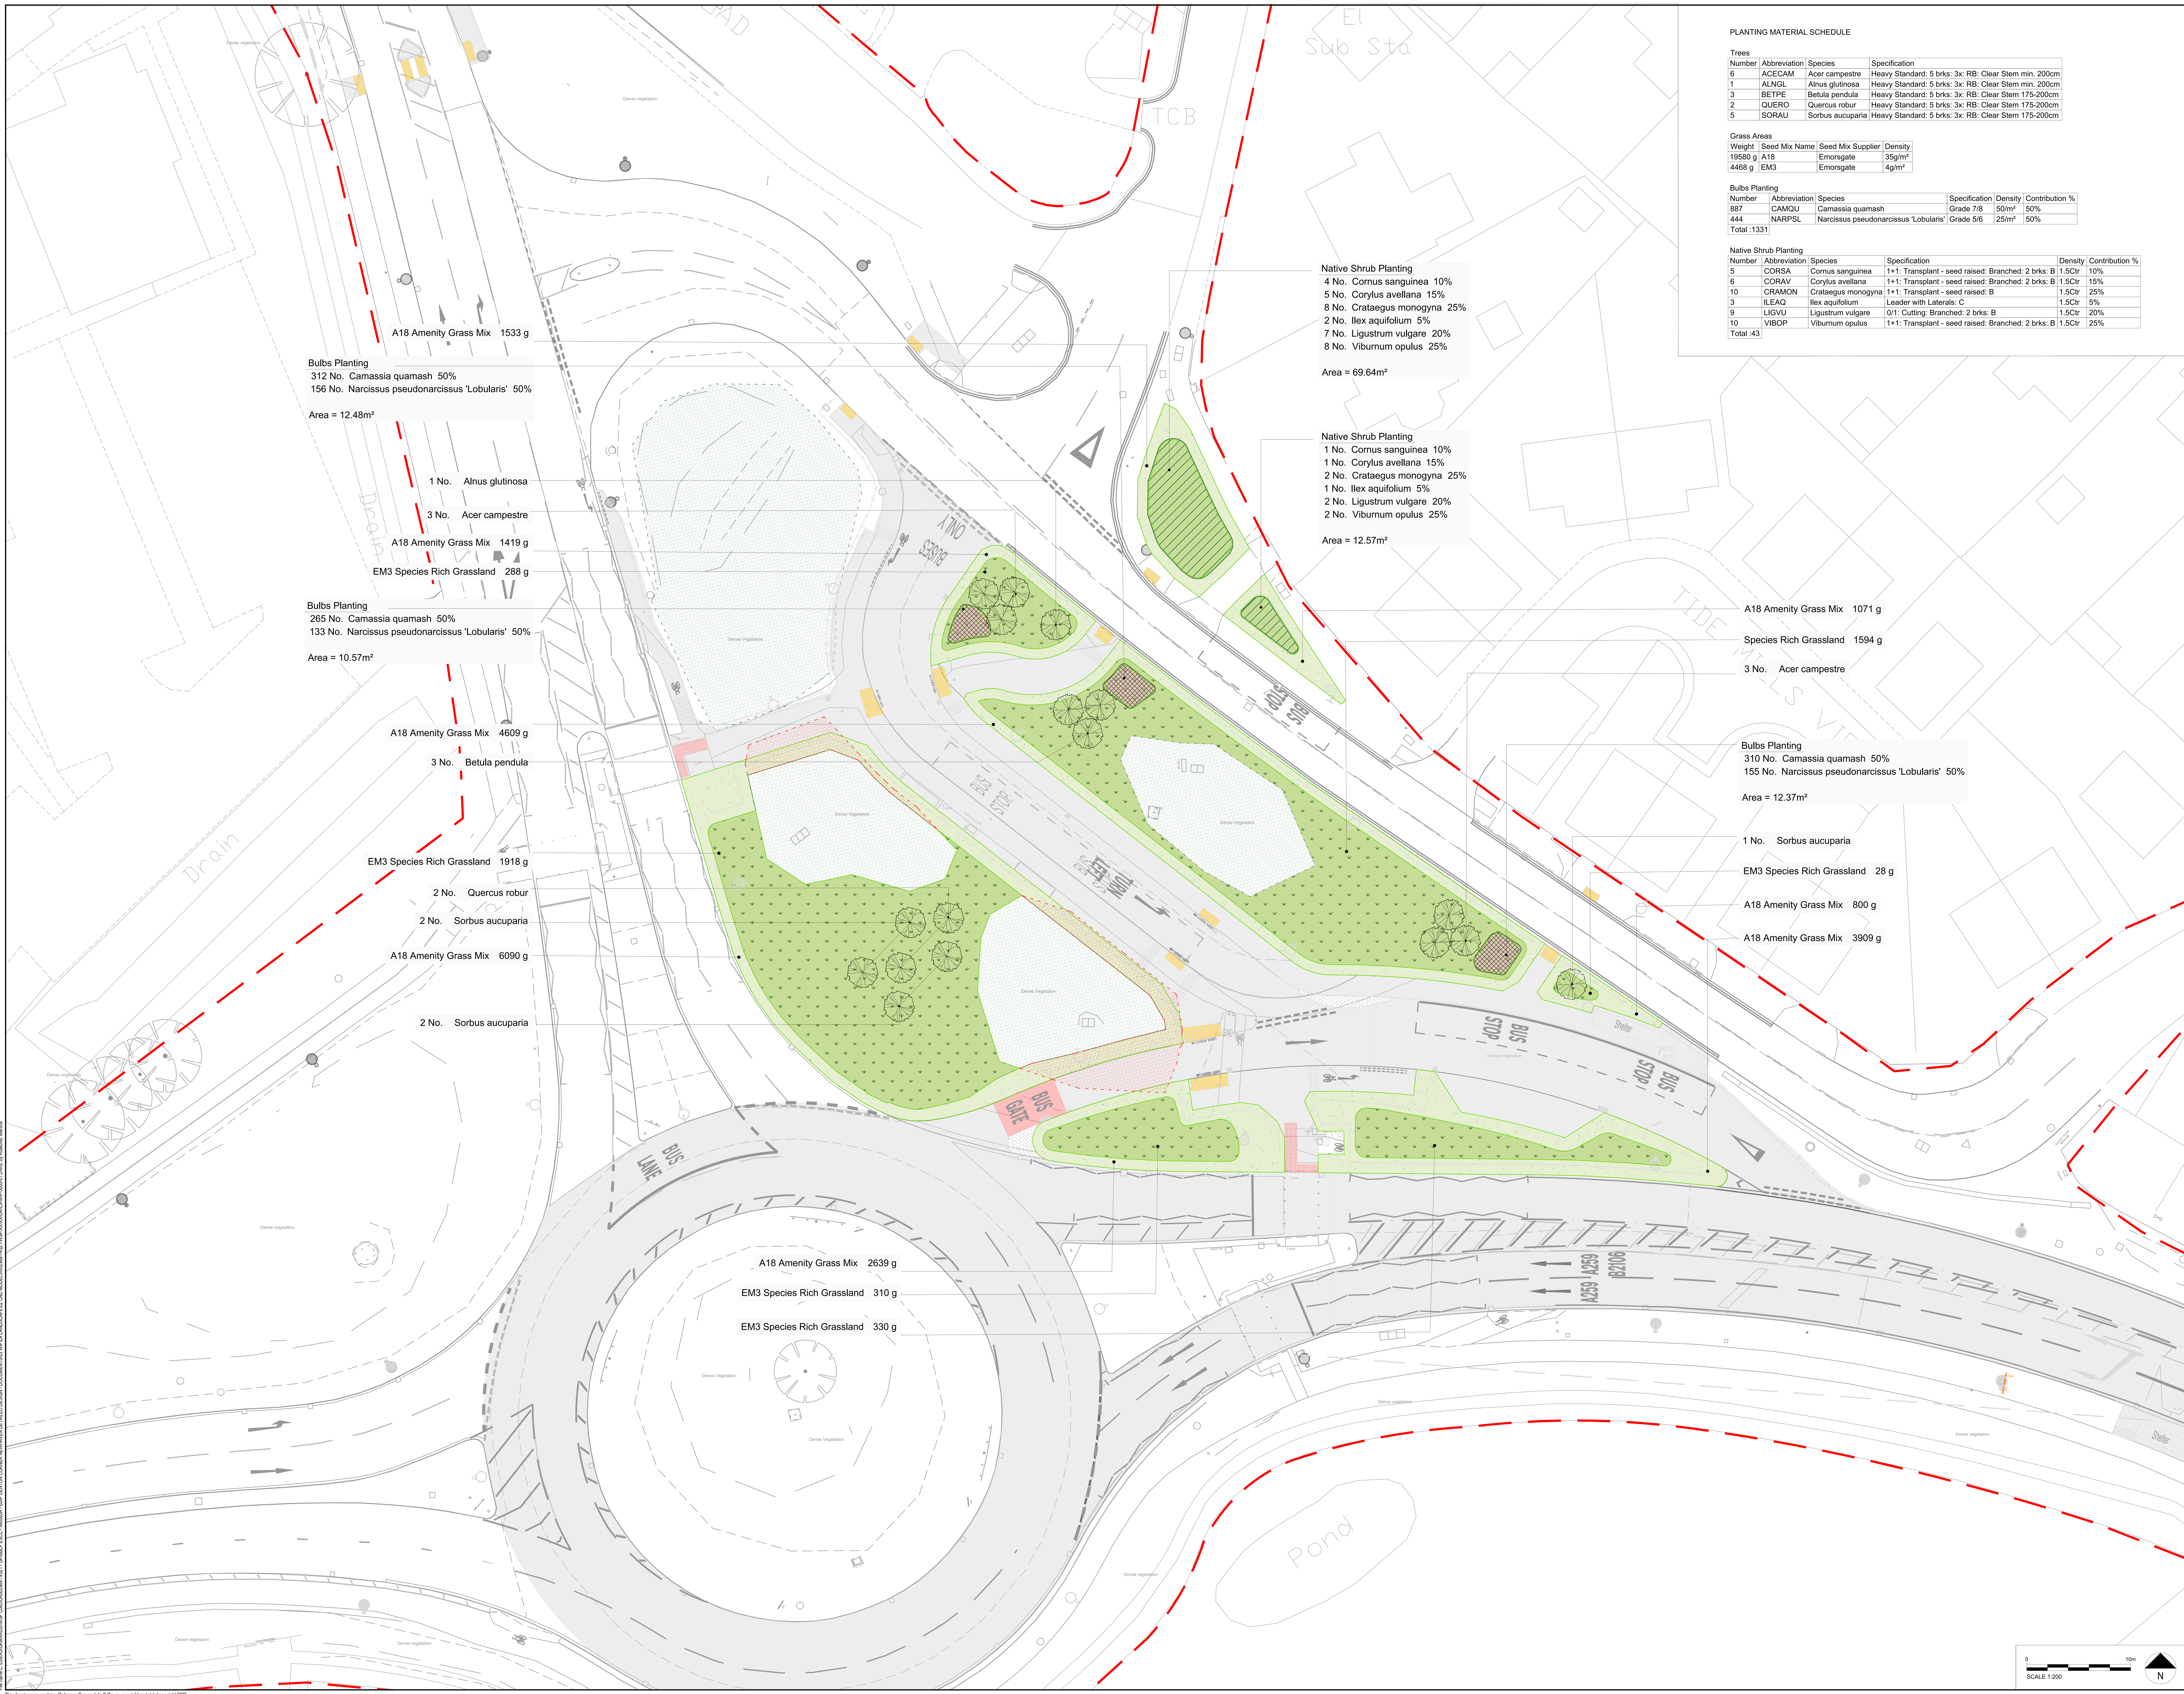


PLANTING MATERIAL SCHEDULE

Trees

| Number | Abbreviation | Species | Specification |
|---|---|---|---|
| 6 | ACECAM | Acer campestre | Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm |
| 1 | ALNGL | Alnus glutinosa | Heavy Standard: 5 brks: 3x: RB: Clear Stem min. 200cm |
| 3 | BETPE | Betula pendula | Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm |
| 2 | QUERO | Quercus robur | Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm |
| 5 | SORAU | Sorbus aucuparia | Heavy Standard: 5 brks: 3x: RB: Clear Stem 175-200cm |

Grass Areas

| Weight | Seed Mix Name | Seed Mix Supplier | Density |
|---|---|---|---|
| 19580 g | A18 | Emorsgate | 35g/m² |
| 4468 g | EM3 | Emorsgate | 4g/m² |

Bulbs Planting

| Number | Abbreviation | Species | Specification | Density | Contribution % |
|---|---|---|---|---|---|
| 887 | CAMQU | Camassia quamash | Grade 7/8 | 50/m² | 50% |
| 444 | NARPSL | Narcissus pseudonarcissus 'Lobularis' | Grade 5/6 | 25/m² | 50% |
| Total :1331 | | | | | |

Native Shrub Planting

| Number | Abbreviation | Species | Specification | Density | Contribution % |
|---|---|---|---|---|---|
| 5 | CORSA | Cornus sanguinea | 1+1: Transplant - seed raised: Branched: 2 brks: B | 1.5Ctr | 10% |
| 6 | CORAV | Corylus avellana | 1+1: Transplant - seed raised: Branched: 2 brks: B | 1.5Ctr | 15% |
| 10 | CRAMON | Crataegus monogyna | 1+1: Transplant - seed raised: B | 1.5Ctr | 25% |
| 3 | ILEAQ | Ilex aquifolium | Leader with Laterals: C | 1.5Ctr | 5% |
| 9 | LIGVU | Ligustrum vulgare | 0/1: Cutting: Branched: 2 brks: B | 1.5Ctr | 20% |
| 10 | VIBOP | Viburnum opulus | 1+1: Transplant - seed raised: Branched: 2 brks: B | 1.5Ctr | 25% |
| Total :43 | | | | | |

# DO NOT SCALE

DRAWING NOTES:

1. THIS DRAWING IS NOT SUITABLE FOR TENDER OR CONSTRUCTION.
2. THIS DRAWING TO BE READ IN CONJUCTION WITH ALL OTHER LANDSCAPE DRAWINGS AND SPECIFICATION
3. DO NOT SCALE FROM THIS DRAWING. USE FIGURED DIMENSIONS ONLY
4. ALL DIMENSIONS ARE METRES UNLESS OTHERWISE STATED
5. DRAWING TO BE PRINTED/PUBLISHED IN COLOUR
6. ANY DISCREPANCIES IN RELATION TO PROPOSALS FROM OTHER DISCIPLINES TO BE REPORTED TO WSP LANDSCAPE TEAM FOR CLARIFICATION




THE CONTRACTOR SHALL NOTIFY THE PROJECT MANAGER OF ANY AMBIGUITIES OR INCONSISTENCIES WITHIN THE DOCUMENTS (WHICH ARE PART OF THIS CONTRACT) AS SOON AS THE CONTRACTOR BECOMES AWARE

DRAWING DESIGN PACKAGE SHOWS THE PERMANENT WORK ELEMENTS / AREAS ONLY. TEMPORARY WORKING AREAS, ACCESS ROUTES, ETC. ARE TO BE DETERMINED BY CONTRACTOR. THE CONTRACTOR SHALL NOTE THE PRESENCE OF EXISTING UTILITIES AS SHOWN ON DRAWING NUMBER 0029891-4321-WSP-XX-XX-DR-HI-502-SERIES AND CONSIDER THE UTILITY INTERFACE AND ADDITIONAL SITE CLEARANCE NECESSARY FOR ANY TEMPORARY WORKS REQUIRED.

**KEY:**
**EXISTING**

- EXISITING HIGHWAY BOUNDARY
- VEGETATION TO BE RETAINED
- VEGETATION TO BE CLEARED

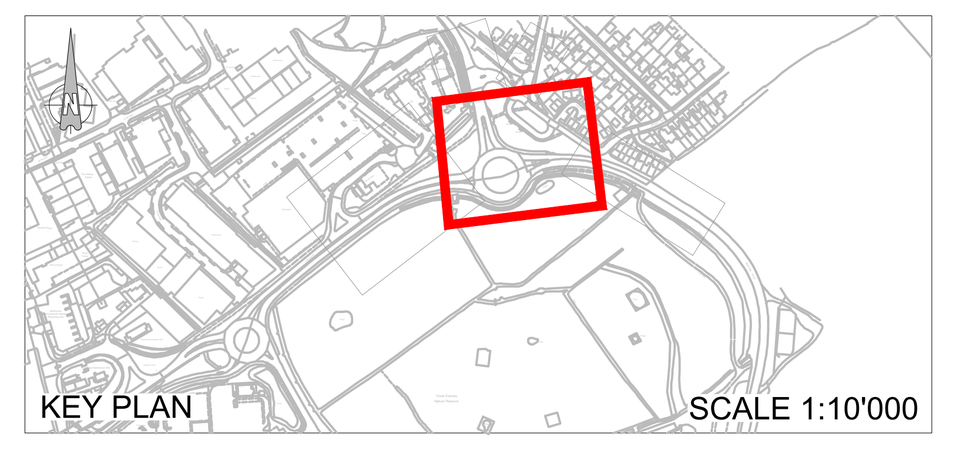**PROPOSED**

For specification and additional information refer to Appendix 30/6- Series 3000 Landscape and Ecology

- PROPOSED TREE
  HEAVY STANDARD
- AMENITY GRASS MIX
  A18 Road Verge and Embankments
- SPECIES RICH GRASSLAND
  Emorsgate (EM3)
- BULB PLANTING
  Planted in Grassland
- NATIVE SHRUB PLANTING
  Underseeded

| REV | DATE | BY | DESCRIPTION | CHK | APP |
|---|---|---|---|---|---|
| C01 | 01/04/2026 | PS | FIRST ISSUE | MR | JMS |

DRAWING STATUS: S4 - FOR CONSTRUCTION

Davidson House (Floor 2),
Forbury Square,
Reading,
RG1 3EU,UK
wsp.com

CLIENT:
East Sussex County Council,
County Hall,
St Anne's Crescent
Lewes
East Sussex
BN7 1UE
(01273) 481261

SITE/PROJECT: East Sussex Bus Service Improvement Plan A259 Newhaven Town Area

TITLE: Landscape General Arrangement and Planting Plan

| SCALE @ A0: | CHECKED: | | APPROVED: |
|---|---|---|---|
| 1:200 | MR | | JMS |
| PROJECT NO: | DESIGNED: | DRAWN: | DATE: |
| 0029891.4321 | PS | PS | FEBRUARY26 |

DRAWING No: 0029891-4321-WSP-XX-XX-DR-LS-3000-01 REV: C01

© WSP UK Ltd