6

Horsey Way Section 3

This section of the cycle route extends from Lottbridge Drove to Langney roundabout and is entirely off road except for the crossing over Lottbridge Drove and Birch Road.

The key aspects of the route are as follows:

- A new staggered Toucan crossing will be constructed across Lottbridge Drove with local footway widening on the corner of Hammonds Drive.
- The cycleway will join the existing footways at Langney roundabout which will be widened to accommodate pedestrians and cyclists.
- The existing footway between the Crumbles Sewer and the local shops will be widened to enable cyclists (mainly school children) to reach the entrance to Tollgate School.
- A stock proof fence will be constructed between the cycleway and the open fields to prevent animals from escaping.
- At the Langney roundabout end of the route a gate system will be installed to allow the farmer to move sheep between the two fields across the cycleway.
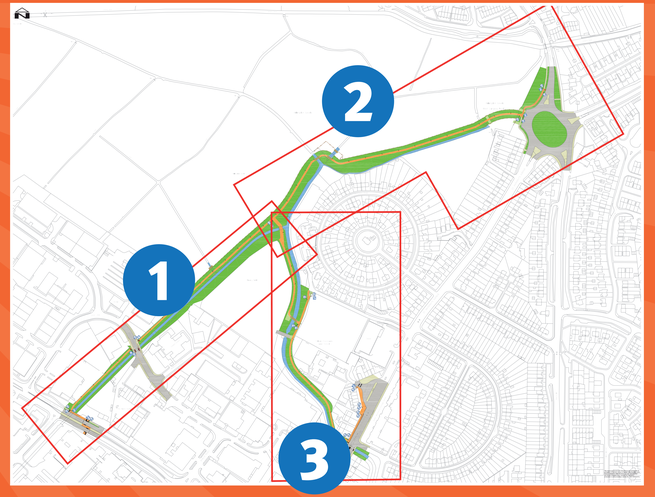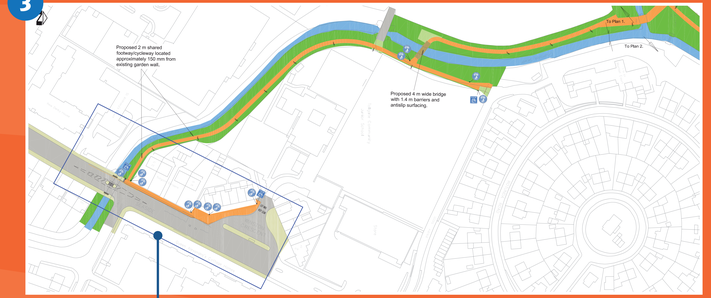
The improvement details for Section 3 of Horsey Way are estimated to cost £650,000 and will be funded from a contribution secured during the development of Sovereign Harbour.